
WAVE II, 24" MONITOR

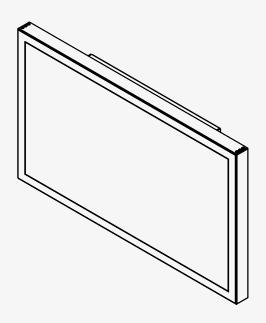

SUMMARY							
ID	30047	NORTH INVENT PART NO	WE240 000 136 (Use for ordering)				
COMPANY NAME	North Invent Norway	NORTH INVENT TYPE NO	WE240-01.MON.02-0136				
VAT	987884002VAT	DRAWING REFERENCE	WE240 000 136 DRW				
ADDRESS	Sørhauggata 128						
	5527 Haugesund						
	NORWAY						

REVISION HISTORY								
APPROVED	CHECKED	DRAWN	STATUS	DESCRIPTION				
2019.02.01	2019.02.01	2018.10.06	Issued for	General Update				
OKJ	OKJ	RNO	Use					
2018.10.10	2018.10.10	2018.10.06	Issued for	Issued for Use				
OKJ	OKJ	RNO	Review					
2018.10.06	2018.10.06	2018.10.06	Issued for Customer	First Revision				
RNO	RNO	RNO	Review					

2018022201 2019.01.18-B1-Packing Information Added

NORTH INVENT


1/4

WAVE II, 24" MONITOR

The Wave II Monitors are a series of well-designed, rugged LED displays with full glass front and PCAP multitouch option.

The minimized outer measurements and modular design offer unprecedented configuration and mounting flexibility. Our unique hinge design ensures that table-top or ceiling mounting is equally easy and visually appealing as flush mounting the glass front into a cut-out.

All our monitors are provided with either AC, DC or AC/DC Multipower, whereas our proprietary controllerboard offer extended functionality and connectivity options.



TECHNICAL SPECIFICATIONS WE240 000 136

MATCHING STANDARDS

IEC 60945, IEC 61174 (ECDIS), IEC 60936 (Radar), IEC 62.288 (Navigation), IEC 62.388 (Radar), IEC 60529 (IP), IACS E10, EMC Directive-2014/30/EU, RoHS, REACH, MIL-STD-810 (Shock), MIL-STD-167-1A (Vibration), IEC 61000-6-2 (EMI), IEC 61000-6-4 (EMC), IEC 60068-2-27 (Shock)

(SHOCK)			
DISPLAY SIZE	24,0" - 609.6 mm, Active area 531.36 (W) X 298.89 (H) mm		
OVERALL DIMENSIONS	574 (W) x 341 (H) x 78 (D) mm		
NET / GROSS WEIGHT	7.5 / 10.6 kg		
RESOLUTION	Max 1920 x 1080 pixels (Full HD)		
RESPONSE TIME	25 ms		
CONTRAST RATIO	3000:1 (typ)		
DOT PITCH	0.27675 (H) x 0.27675 (V) mm		
LIGHT INTENSITY	300 cd/m2 (typ)		
NUMBERS OF COLOURS	16,7 Millions depending on graphics card		
VIEWING ANGLE	±89°		
CONTROL KNOBS	NO (Controllable by standard mouse interface)		
SUPPLY VOLTAGE	90-264 VAC (IEC Inlet) and 18-36 VDC (DFK-MSTB 2,5/ 3-GF-5,08)		
POWER CONSUMPTION	Approx. 45W		
COLOUR	RAL 9005 Fine Structure		
ENCLOSURE PROTECTION	IP 42 (From Front)		
GLASS TYPE	3mm Tempered, Anti Reflective Conturan@		
INPUT/ CONTROL INPUT	2x DVI-I (Analogue AND Digital), DVI OUT, $2x$ Display port, DDC/CI (DVI & DP), RS 422/485, $2x$ USB 2.0, Micro SD, USB Type B (Touch Only), $2x$ Ethernet, HMI (15p D-Sub Female), RS 232 (9p D-Sub Female)		
OPERATING / STORAGE TEMPERATURE	-15/+70° C, -15/+70° C (+5/+158° F, +5/+158° F)		
BACKLIGHT LIFE	Typ 50.000 Hours		
DIMMING RANGE	0-100%		
INCLUDED ACCESSORIES	NO		
тоисн	NO		
ADDITIONAL FEATURE	Onboard iMX6 CPU		


2018101001 2019.01.18-B1-Packing Information Added





2/4

WAVE II, 24" MONITOR

TECHNICAL SPECIFICATIONS WE240 000 136

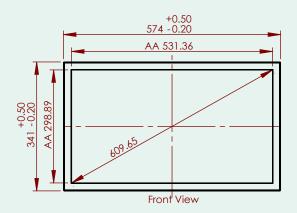




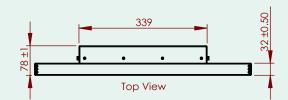



Bottom View

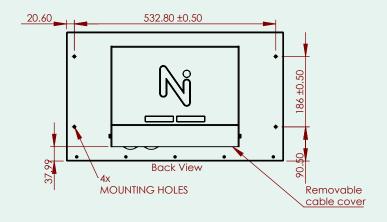

2018021702 2019.01.18-B1-Packing Information Added


NORTH INVENT

WAVE II, 24" MONITOR

TECHNICAL SPECIFICATIONS WE240 000 136

Included in Part 1 of 1

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	WE999 000 126	1.8m, AC Power Cable	1
2	WE999 000 128	1.8m, Display Port Cable	1

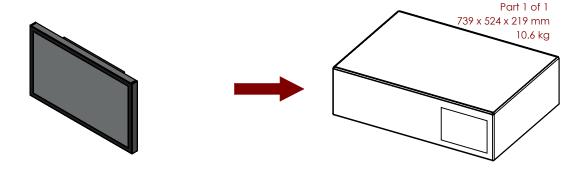

2018021702 2019.01.18-B1-Packing Information Added

NORTH INVENT