


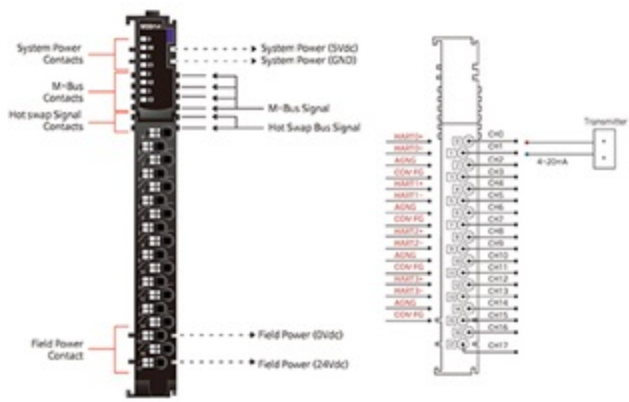

M5914
HART Communication module

4 channel HART interface (single ended)
4~20 mA
16 bit resolution
HART Revision 5
Hotswap
18pt removable terminal block (RTB18C)

Facts

General description

Article number	100-8259
Warranty	Up to 2 years
Article status	Active
Shock operating	IEC 60068-2-27 (15G)
Vibration resistance	Sine vibration (based on IEC 60068-2-6), DNVGL-CG-0339 (Vibration Class B, 4G)
Industrial emissions	EN 61000-6-4/2019
Industrial immunity	EN 61000-6-2 : 2019
Power dissipation	Horizontal, Vertical
Isolation	Max. 30 mA @ 5.0 VDC
Field power	I/O to Logic : Isolation
Weight	Supply voltage: 24 VDC nominal, Voltage range: 18~28.8 VDC, Power Dissipation: Max. 10 mA @ 24 VDC
Module size	72g
	12 x 110 x 75 mm

Certifications

General	CE, FCC, UL, cUL
Hazardous	UL C1D2, ATEX (Zone2)
Marine	DNV GL
Safety	UL508, CAN/CSA C22.2 No.142-M1987

Environmental

Mounting	35mm DIN rail
Operating temperature	-25 ~ 60°C
Storage temperature	-40 ~ 85°C
UL temperature	-25 ~ 60°C
Relative humidity	5 ~ 90% non-condensing

Analog input module specifications

Calibration	Not required
Common type	4 Common, Field Power 0V is Common(AGND)
Conversion time	30 msec / All channel
Data format	16 bits Integer (2' compliment)
Etc function	HART Revision 5, Open circuit detection I _{meas} < 3.5 mA, Short circuit detection I _{meas} > 22mA
Indicators	4 Green & 4 Red Input status
Input current range	4~20 mA
Input impedance	270 Ω
Inputs per module	4 channels single ended, non-isolated between channels
Module error	±0.1% Full Scale @ 25°C ambient, ±0.3% Full Scale @ -25°C~60°C
Resolution in ranges	16 bits (Include Sign), 15 bits : 0.49 uA/Bit(4~20 mA)

People & Technology. Connected.

We are a people company. Our experienced, skilled and passionate people empower you to meet your challenges through best-in-class, user-friendly solutions. We are a technology company. We help you optimize processes through our software, hardware and services, and through our support. Connecting people and technologies gives you the means to accomplish your goals and ambitions, and gain a competitive edge in today's digitalized world.

Beijer Electronics, Inc.
850 South 3600 West, Suite C
Salt Lake City, UT 84104
USA

Sales: +1 801-708-6631 Support: +1 801-708-6690 (tel:Sales: +1 801-708-6631 Support: +1 801-708-6690)
sales.americas@beijerelectronics.com (mailto:sales.americas@beijerelectronics.com)